



L-Coupling

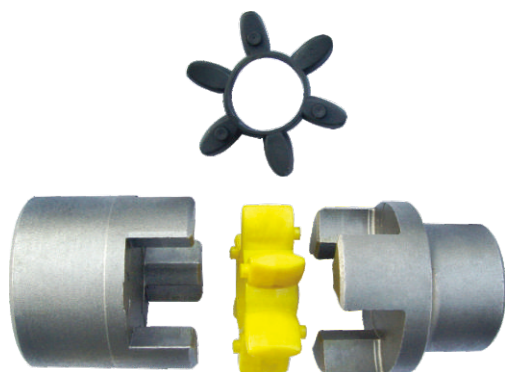


- Good temperature and oil resistance
- Free of maintenance
- Simple structure and easy to install
- The rubbers can be individually replaced when they are worn
- Standard products are finished bore products needed

CL035-CL150



CL190-CL276



The couplings are made of GG 25 material. The surface is machined and zinc plated.

TYPE	Fundamental dimensions					Torgue needed kgm	Rotational speed r/om	Bore max mm	Stock bore sizes of the couplings	Mass kg
	A	B	C	D	E					
CL 035	16	21	8	6.5	-	0.05	30.000	9	8	0.03
CL 050	28	45	12	15.5	-	0.3	17.000	16	10. 12. 14. 16	0.13
CL 070	35	51	13	19	-	0.5	13.000	19	10. 12. 14. 16. 18. 19	0.24
CL 075	45	55	13	20.5	-	1.0	10.000	24	12. 14. 16. 18. 19. 20.22.24	0.40
CL 090	54	55	13	21	-	1.6	9.000	25	14. 16. 18. 19. 20.22.24. 25	0.68
CL 095	54	64	13	25.5	-	2.2	9.000	29	14. 16. 18. 19. 20.22.24. 25. 28	0.71
CL 099	65	73	19	27	-	4.5	7.000	35	20.22.24. 25. 28. 30. 32. 35	1.22
CL 100	65	89	19	35	-	5.0	7.000	35	20.22.24. 25. 28. 30. 32. 35	1.40
CL 110	84	108	22	43	-	9.0	5.000	42	25. 28. 30. 32. 35.38. 40. 42	3.0
CL 150	96	115	25	45	80	15.0	5.000	48	30. 32. 35.38. 40. 42. 45. 48	5.0
CL 190	115	134	25	54	102	20.0	5.000	54	35.38. 40. 42. 45. 48. 50	7.6
CL 225	127	154	26	64	108	30.0	4.000	67	38. 40. 42. 45. 48. 50. 55. 60. 65	9.0
CL 276	157	200	41	79	127	54.2	4.000	73	45. 48. 50. 55. 60. 65. 70	21.0

Keyway dimensions conform to DIN6885, JIS B 1310-1976, UNI6604-1969, GB1095-1979 standards.