


Split Taper Bushing

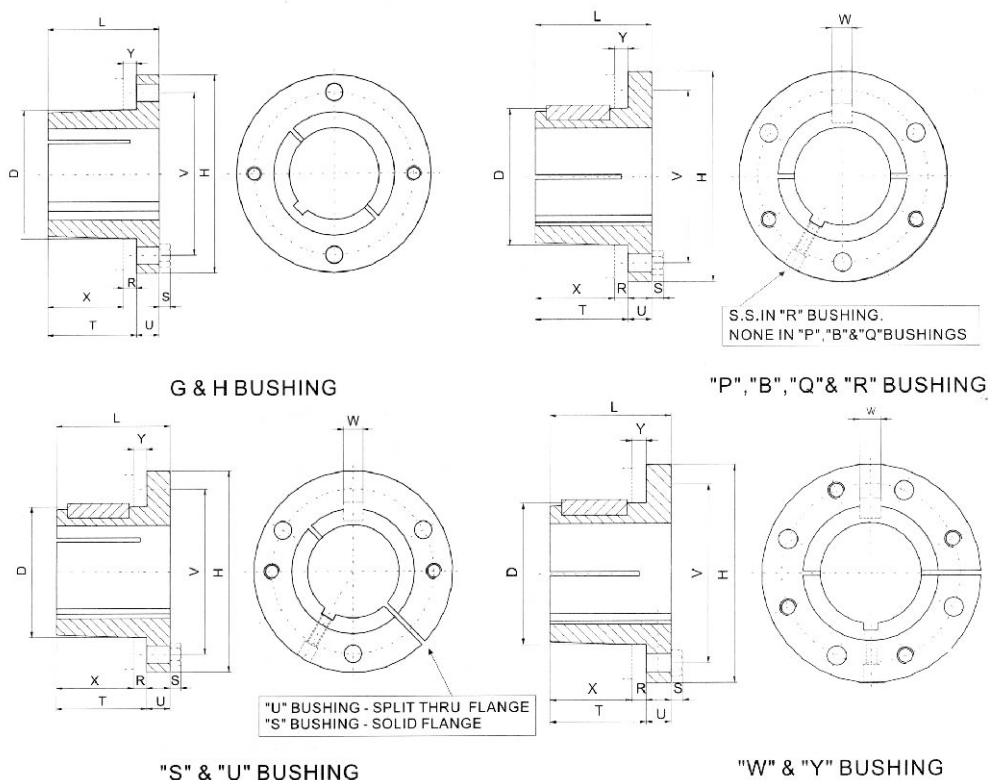


TYPE 1

Bushing Specifications

Part No.	Dimensions												Type 1 Bore Range	Cap Screws		Av.
	L	U	T	D		H	V	W	X	Y	R	S		No.	Size	Wt.
				Large End	Small End											Lbs
G	1"	1/4"	3/4"	1.172"	1.133"	2"	1 9/16"		5/8"	3/16"	1/8"	3/16"	3/8" - 1 5/16"	2	1/4" X 5/8"	.5
H	1 1/4	1/4	1	1.625	1.570	2 1/2	2		7/8	3/16	1/8	3/16	3/8" - 1 3/8	2	1/4 X 3/4	.8
P1	1 15/16	13/32	1 17/32	1.9375	1.8555	3	2 7/16	3/8"	1 5/16	7/32	7/32	1/4	1/2 - 1 7/16	3	5/16 X 1	1.3
P2	2 15/16	13/32	2 17/32	1.9375	1.7390	3	2 7/16	3/8	2 5/16	7/32	7/32	1/4	3/4 - 1 7/16	3	5/16 X 1	1.5
P3	4 7/16	13/32	4 1/32	1.9375	1.6993	3	2 7/16	3/8	3 13/16	7/32	7/32	1/4	1 1/8 - 1 3/8	3	5/16 X 1	2
B	1 15/16	1/2	1 7/16	2.625	2.5567	3 1/16	3 1/8	1/2	1 3/16	7/32	1/4	1/4	1/2 - 1 15/16	3	5/16 X 1 1/4	1.8
Q1	2 1/2	17/32	1 31/32	2.875	2.7657	4 1/8	3 3/8	1/2	1 3/4	7/32	7/32	9/32	3/4 - 2 1/16	3	3/8 X 1 1/4	3.5
Q2	3 1/2	17/32	2 31/32	2.875	2.7032	4 1/8	3 3/8	1/2	2 3/4	7/32	7/32	9/32	1 - 2 1/16	3	3/8 X 1 1/4	4.5
Q3	5	17/32	4 15/32	2.875	2.6094	4 1/8	3 3/8	1/2	4 1/4	7/32	7/32	9/32	1 3/8 - 2 1/16	3	3/8 X 1 1/4	5.5
R1	2 7/8	5/8	2 1/4	4.000	3.8750	5 3/8	4 5/8	3/4	2	1/4	1/4	9/32	1 1/8 - 2 13/16	3	3/8 X 1 3/4	7.5
R2	4 7/8	5/8	4 1/4	4.000	3.7500	5 3/8	4 5/8	3/4	4	1/4	1/4	9/32	1 3/8 - 2 13/16	3	3/8 X 1 3/4	11
S1	4 3/8	3/4	3 5/8	4.625	4.4180	6 3/8	5 3/8	3/4	3 5/16	5/16	5/16	3/8	1 11/16 - 3 3/16	3	1/2 X 2 1/4	13.5
S2	6 3/4	3/4	6	4.625	4.2696	6 3/8	5 3/8	3/4	5 11/16	5/16	5/16	3/8	1 7/8 - 3 3/16	3	1/2 X 2 1/4	19
U0	5 1/4	1 1/16	4 3/16	6.000	5.7656	8 3/8	7	1 1/4	3 3/4	7/16	7/16	15/32	2 3/8 - 3 1/16	3	5/8 X 2 3/4	30
U0	4 15/16	3/4	4 3/16	6.000	5.7656	8 3/8	7	1 1/4	3 3/4	7/16	7/16	15/32	3 1/4 - 4 1/4	3	5/8 X 2 3/4	27
U1	7 1/8	1 1/16	6 1/16	6.000	5.6485	8 3/8	7	1 1/4	5 5/8	7/16	4/16	15/32	2 3/8 - 4 1/4	3	5/8 X 2 3/4	40
U2	10 1/8	1 1/16	9 1/16	6.000	5.4610	8 3/8	7	1 1/4	8 5/8	7/16	7/16	15/32	2 7/16 - 4 1/4	3	5/8 X 2 3/4	50
W1	8 1/4	1 7/16	6 13/16	8.500	8.1016	12 1/2	10	1 1/4	6 3/8	7/16	7/16	9/16	3 3/8 - 6 3/16	4	3/4 X 3	104
W2	11 1/8	1 7/16	9 13/16	8.500	7.9141	12 1/2	10	1 1/4	9 3/8	7/16	7/16	9/16	3 3/8 - 6 3/16	4	3/4 X 3	133
Y0*	11 1/8	2	9 1/8	12.000	11.4688	16 1/2	14 1/2	2	8 1/2	5/8	5/8	5/8	6 - 7 15/16	4	1 X 5	270

Split Taper Bushing

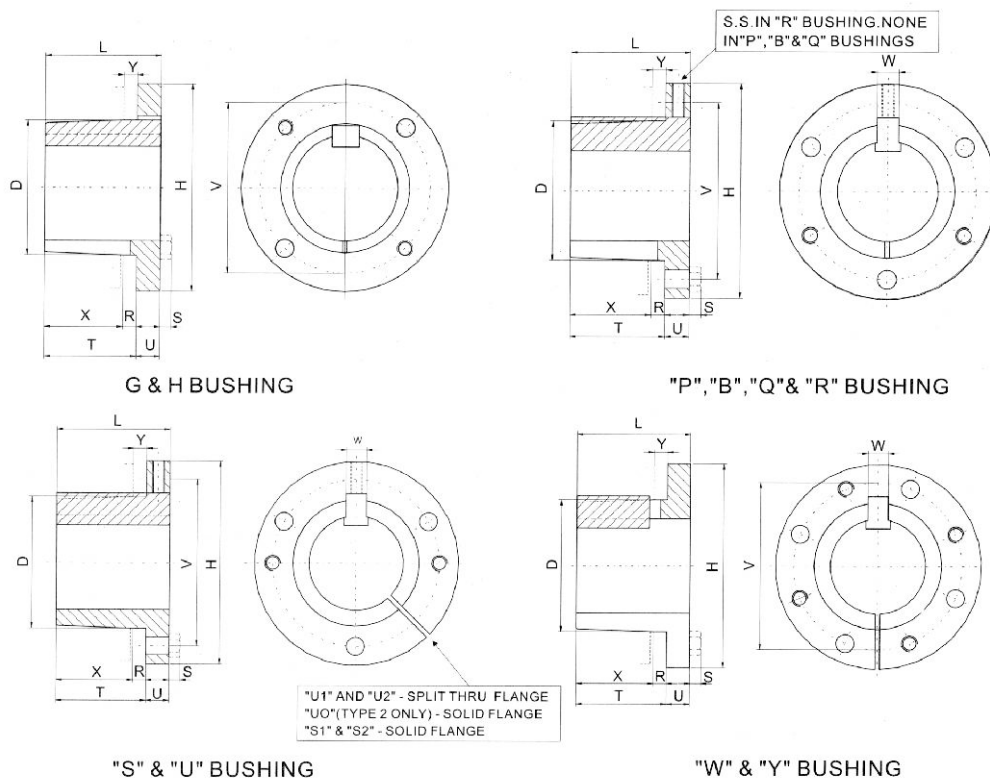

TYPE 2

Bushing Specifications

Part No.	Dimensions												Type 1 Bore Range	Cap Screws		Av.
	L	U	T	D		H	V	W	X	Y	R	S		No.	Size	Wt.
				Large End	Small End											Lbs
G	1"	1/4"	3/4"	1.172"	1.133"	2"	1 9/16"		5/8"	3/16"	1/8"	3/16"	1"	2	1/4" × 5/8"	.5
H	1 1/4	1/4	1	1.625	1.570	2 1/2	2		7/8	3/16	1/8	3/16	1 7/16 – 1 1/2	2	1/4 × 3/4	.8
P1	1 15/16	13/32	1 17/32	1.9375	1.8555	3	2 7/16	3/8"	1 5/16	7/32	7/32	1/4	1 1/2 – 1 3/4	3	5/16 × 1	1.3
P2	2 15/16	13/32	2 17/32	1.9375	1.7390	3	2 7/16	3/8	2 5/16	7/32	7/32	1/4	1 1/2 – 1 3/4	3	5/16 × 1	1.5
P3	4 7/16	13/32	4 1/32	1.9375	1.6993	3	2 7/16	3/8	3 13/16	7/32	7/32	1/4	1 5/8	3	5/16 × 1	2
B	1 15/16	1/2	1 7/16	2.625	2.5567	3 1/16	3 1/8	1/2	1 3/16	7/32	1/4	1/4	2 – 2 7/16	3	5/16 × 1 1/4	1.8
Q1	2 1/2	17/32	1 31/32	2.875	2.7657	4 1/8	3 3/8	1/2	1 3/4	7/32	7/32	9/32	2 1/8 – 2 11/16	3	3/8 × 1 1/4	3.5
Q2	3 1/2	17/32	2 31/32	2.875	2.7032	4 1/8	3 3/8	1/2	2 3/4	7/32	7/32	9/32	2 1/8 – 2 5/8	3	3/8 × 1 1/4	4.5
Q3	5	17/32	4 15/32	2.875	2.6094	4 1/8	3 3/8	1/2	4 1/4	7/32	7/32	9/32	2 1/8 – 2 1/2	3	3/8 × 1 1/4	5.5
R1	2 7/8	5/8	2 1/4	4.000	3.8750	5 3/8	4 5/8	3/4	2	1/4	1/4	9/32	2 7/8 – 3 3/4	3	3/8 × 1 3/4	7.5
R2	4 7/8	5/8	4 1/4	4.000	3.7500	5 3/8	4 5/8	3/4	4	1/4	1/4	9/32	2 7/8 – 3 5/8	3	3/8 × 1 3/4	11
S1	4 3/8	3/4	3 5/8	4.625	4.4180	6 3/8	5 3/8	3/4	3 5/16	5/16	5/16	3/8	3 1/4 – 4 1/4	3	1/2 × 2 1/4	13.5
S2	6 3/4	3/4	6	4.625	4.2696	6 3/8	5 3/8	3/4	5 11/16	5/16	5/16	3/8	3 1/4 – 4 3/16	3	1/2 × 2 1/4	19
U0	5 1/4	1 1/16	4 3/16	6.000	5.7656	8 3/8	7	1 1/4	3 3/4	7/16	7/16	15/32	–	3	5/8 × 2 3/4	30
U0	4 15/16	3/4	4 3/16	6.000	5.7656	8 3/8	7	1 1/4	3 3/4	7/16	7/16	15/32	4 3/8 – 5 1/2	3	5/8 × 2 3/4	27
U1	7 1/8	1 1/16	6 1/16	6.000	5.6485	8 3/8	7	1 1/4	5 5/8	7/16	7/16	15/32	4 3/8 – 5 1/2	3	5/8 × 2 3/4	40
U2	10 1/8	1 1/16	9 1/16	6.000	5.4610	8 3/8	7	1 1/4	8 5/8	7/16	7/16	15/32	4 3/8 – 5	3	5/8 × 2 3/4	50
W1	8 1/4	17/16	6 13/16	8.500	8.1016	12 1/2	10	1 1/4	6 3/8	7/16	7/16	9/16	6 1/4 – 7 7/16	4	3/4 × 3	104
W2	11 1/8	17/16	9 13/16	8.500	7.9141	12 1/2	10	1 1/4	9 3/8	7/16	7/16	9/16	6 1/4 – 7 7/16	4	3/4 × 3	133
Y0*	11 1/8	2	9 1/8	12.000	11.4688	16 1/2	14 1/2	2	8 1/2	5/8	5/8	5/8	8 – 10	4	1 × 5	270